

Home > Maintenance, Repair & Operations Parts > 41303

41303 – Technical Data Sheet

✓ Government record, cited

Lindy · MRO · MRO_GENERAL

WHAT YOU NEED TO KNOW

Verify manufacturer and server generation compatibility Check if Option PN or Spare PN — same part, different channel

⚠ Confirm exact part number — similar PNs may be different parts

PRODUCT OVERVIEW

Our Fibre Optic DVI-D cables are the easy solution for extending DVI digital signals over incredible distances. The fibre-optic technology used allows transmission distances that far exceed the maximum supported by standard copper-based cables.

These cables are a hybrid design which feature H-PCF (Hard-Polymer Clad Fibre) glass fibres for the digital display signals and copper wires for the DDC / HDCP control signals. The Transmitter and Receiver modules are each equipped with standard DVI-D Male connectors for connecting to the source (e.g.

DVI graphics card) and the display. The modules are connected together by the combined fibre optic and copper cable. This integrated design makes for true 'Plug & Play' operation.

This part is cataloged in the U.S. Government catalog under NSN 5910-00-607-3471, indicating validated use in U.S. government and defense logistics supply chains.

WHERE IT FITS

MRO → MRO_GENERAL

→ 41303

NSN: 5910-00-607-3471

NIINs: 006073471 , 008721712 , 010911134 ,


SPECIFICATIONS

	CAP FOR BUFFER BOTTLE USED ON ANALYZER,BLOOD GAS; MDL. 1304; NSN 6630-01-256-3264
special_features	

011138858 , 012722605 ,
013058178 , 016657250
FSC: 5910 — Capacitors
CAGE: 29201 — JOHN DEER
CONSUMER PRODUCTS INC
(USA)

CAP SCREW BTL &
JAR F/BUFFER BTL
part_name_assigned_by_controlling_agencyU/O 6630-01-
256-3264
ANALYZER
NSN5910-00-607-
3471

COMPONENT DIAGRAM

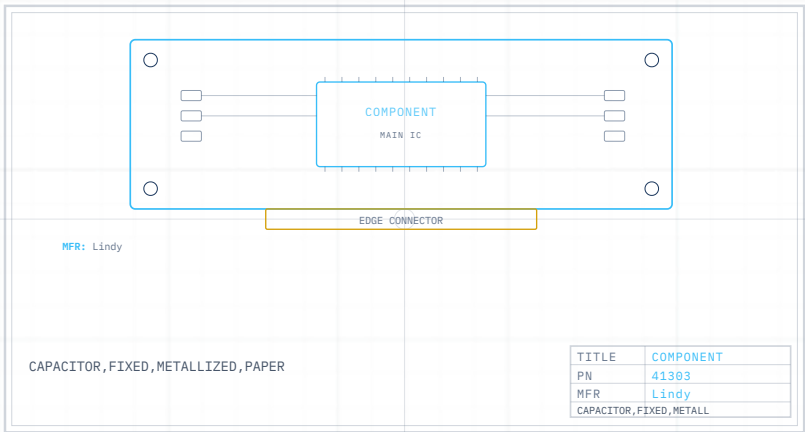

KEY FEATURES

- **BODY DIAMETER: 1.031 INCHES NOMINAL IN**
- **CONTINUOUS CURRENT RATING IN AMPS: 200.0**
- **BODY STYLE: W/MTG BRACKET, TERMINALS ON OPPOSITE ENDS**
- **TOLERANCE RANGE PER SECTION: -20.00 TO 20.00 PERCENT SINGLE SECTION**
- **NONDERATED OPERATING TEMP: -55.0 CELSIUS MINIMUM AND 85.0 CELSIUS MAXIMUM DEGC**
- **CENTER TO CENTER DISTANCE BETWEEN MOUNTING FACILITIES PARALLEL TO DIAMETER: 1.250 INCHES NOMINAL IN**
- **UNTHREADED MOUNTING HOLE DIAMETER: 0.150 INCHES NOMINAL IN**

TYPICAL APPLICATIONS

- RAID cache protection during power loss events
- Write-back cache enablement for storage controllers
- Enterprise server data integrity assurance
- Hot-swap battery/capacitor replacement in production

- NONDERATED CONTINUOUS VOLTAGE RATING AND TYPE PER SECTION: 50.0 DC SINGLE SECTION

TECHNICAL CHARACTERISTICS

BODY DIAMETER	1.031 INCHES NOMINAL IN
CONTINUOUS CURRENT RATING IN AMPS	200.0
BODY STYLE	W/MTG BRACKET, TERMINALS ON OPPOSITE ENDS
TOLERANCE RANGE PER SECTION	-20.00 TO 20.00 PERCENT SINGLE SECTION
NONDERATED OPERATING TEMP	-55.0 CELSIUS MINIMUM AND 85.0 CELSIUS MAXIMUM DEGC
CENTER TO CENTER DISTANCE BETWEEN MOUNTING FACILITIES PARALLEL TO DIAMETER	1.250 INCHES NOMINAL IN
UNTHREADED MOUNTING HOLE DIAMETER	0.150 INCHES NOMINAL IN
NONDERATED CONTINUOUS VOLTAGE RATING AND TYPE PER SECTION	50.0 DC SINGLE SECTION
SCHEMATIC DIAGRAM DESIGNATOR	FEEDTHROUGH
CASE INSULATION MATERIAL	PAPER

SUBSTITUTES & CROSS-REFERENCES
 12

M3388
 Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

7085736-00
 Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

3137507-00
 Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

41303K
 Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

261887
 Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

LIFECYCLE

NSN status
 Cancelled
 · U.S. Government catalog

Acquisition advice: Normally procured from the manufacturer (OEM)

No demilitarization required

41303-EF
Possible match (shared part number)

Possible match (shared part number)
 Possible match (shared part number)

FREQUENTLY ASKED QUESTIONS

What is 41303?

41303 is a CAPACITOR, FIXED, METALLIZED, PAPER manufactured by Lindy. It is classified as a MRO (MRO_GENERAL).

What parts can replace 41303?

There are 12 known substitutes for 41303: M3388, 7085736-00, 3137507-00 and 9 more. Substitute compatibility should be verified for your specific system.

What is the NSN for 41303?

41303 is cataloged in the U.S. Government catalog under NSN 5910-00-607-3471. This indicates validated use in U.S. government and defense supply chains.

✓ PartsTable — the parts reference. Every fact cited to its source.


 PartsTable Design LLC · partstable.com

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-18.

PartsTable commercial catalog: edition Unified commercial catalog snapshot through 2026-09-28, edition date not on file, retrieved 2026-09-28.