

Pin, Quick Release

5315-01-059-7677


NSN 5315-01-059-7677 · NIIN 010597677

FSC 5315 — Nails, Machine Keys, and Pins · FSG 53 — Hardware and Abrasives


GOVERNMENT RECORD, CITED

ALSO SEARCHED AS
 5315-01-059-7677 ·
 5315010597677 ·
 NIIN 010597677 ·
 01-059-7677 ·
 FSC 5315 Nails, Machine Keys, and Pins ·
 SLC6AT70 ·
 BLC6TA70S ·
 LG6CT7000 ·
 MS17985C670 ·
 MS17985C670

NEARBY STOCK NUMBERS
 ← 5315-01-059-7676 Pin, Quick Release ·
 5315-01-059-7678 →

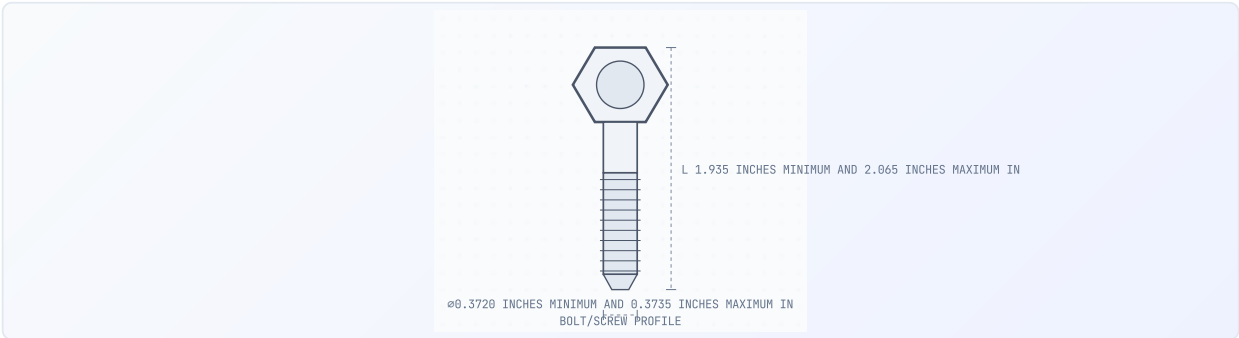

5315-01-059-7677 — NAILS, MACHINE KEYS, AND PINS

FEATURES

- Pin,quick Release — FSC 5315
- Shank Diameter: 0.3720 INCHES MINIMUM AND 0.3735 INCHES MAXIMUM IN
- Actuation Method: LEVER
- Detent to Tapered End Distance: 0.335 INCHES MINIMUM AND 0.365 INCHES MAXIMUM IN
- Detent Quantity: 2
- Surface Treatment Document and Classification: QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE SHANK
- Surface Treatment Document and Classification: QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE SPINDLE
- Handle Length: 1.935 INCHES MINIMUM AND 2.065 INCHES MAXIMUM IN

IDENTIFICATION

- NSN: 5315-01-059-7677
- NIIN: 010597677
- FSC: 5315 — Nails, Machine Keys, and Pins
- FSG: 53 — Hardware and Abrasives

GENERAL DESCRIPTION

The Pin,quick Release, cataloged under National Stock Number 5315-01-059-7677, is classified within Federal Supply Class 5315 (Nails, Machine Keys, and Pins) of the Hardware and Abrasives group. Government technical data includes 21 specifications, cited from the U.S. Government catalog. 9 additional reference documents (drawings, advisory and superseded references) are recorded in the U.S. Government catalog. Current acquisition status: Active.

TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
NSN	5315-01-059-7677
Item Name	Pin,quick Release
FSC / FSG	5315 / 53 — Nails, Machine Keys, and Pins
Status	ACTIVE
Shank Diameter	0.3720 INCHES MINIMUM AND 0.3735 INCHES MAXIMUM IN

PARAMETER	VALUE
Actuation Method	LEVER
Detent to Tapered End Distance	0.335 INCHES MINIMUM AND 0.365 INCHES MAXIMUM IN
Detent Quantity	2
Surface Treatment Document and Classification	QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE SHANK
Surface Treatment Document and Classification	QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE SPINDLE
Handle Length	1.935 INCHES MINIMUM AND 2.065 INCHES MAXIMUM IN
Actuation Type	PUSH
Hardness Rating	40.0 ROCKWELL C MINIMUM SPINDLE
Hardness Rating	40.0 ROCKWELL C MINIMUM SHANK
Pin Attachment Type	HOOK OR RING
Style Designator	T HANDLE
Material Document and Classification	AMS 5643 ASSN STD 1ST MATERIAL RESPONSE OR AMS 5657 ASSN STD 2ND MATERIAL RESPONSE SPINDLE
Material Document and Classification	AMS 5643 ASSN STD 1ST MATERIAL RESPONSE OR AMS 5657 ASSN STD 2ND MATERIAL RESPONSE SHANK
Grip Length	7.000 INCHES MINIMUM AND 7.020 INCHES MAXIMUM IN
Surface Treatment	PASSIVATE SPINDLE
Surface Treatment	PASSIVATE SHANK
Shear Strength	20600 DOUBLE POUND
Material	STEEL COMP 630 OR STEEL COMP 632 SHANK
Material	STEEL COMP 630 OR STEEL COMP 632 SPINDLE
Shoulder to Head End Distance	1.450 INCHES MAXIMUM IN

LIFECYCLE & COMPLIANCE

Acquisition Status	ACTIVE
DEMIL Code	DEMIL A — NO DEMILITARIZATION REQUIRED
Hazard	NO HAZARD CODE IN THE DLA RECORD (HMIC N)
Criticality Code	X

CROSS-REFERENCE INDEX

No manufacturer part numbers on file in the U.S. Government catalog.

REFERENCE DOCUMENTS

REFERENCE	MEANING
SLC6AT70	5/9 Secondary reference Space-Lok, Inc. Dba Space-Lok Inc Div Space-Lok
BLC6TA70S	5/9 Secondary reference U.S. Government activity
LG6CT7000	5/9 Secondary reference Southco Inc.
MS17985C670	3/2 Design control — primary reference U.S. Government activity
MS17985C670	5/9 Secondary reference U.S. Government activity
LG6CT70M	5/9 Secondary reference Southco Inc.
BLC6TA70SM	5/9 Secondary reference U.S. Government activity
LG6CT70M	5/9 Secondary reference U.S. Government activity
LG6CT7000	5/9 Secondary reference U.S. Government activity

No interchangeability data on file.

OTHER ITEMS IN FSC 5315 — NAILS, MACHINE KEYS, AND PINS

Items in the same Federal Supply class. No interchangeability or substitution relationship is implied.

5315-00-000-1037 5315-00-000-1037 · Item name not on file	5315-00-000-1067 5315-00-000-1067 · Item name not on file	5315-00-000-1245 5315-00-000-1245 · Item name not on file	5315-00-000-1372 5315-00-000-1372 · Item name not on file
5315-00-000-1412 5315-00-000-1412 · Item name not on file	5315-00-001-1571 PIN	5315-00-001-1572 PIN, LINKAGE	5315-00-001-1602 5315-00-001-1602 · Item name not on file

FREQUENTLY ASKED QUESTIONS

What is NSN 5315-01-059-7677?

NSN 5315-01-059-7677 is a Pin,quick Release, classified under FSC 5315, Nails, Machine Keys, and Pins. Status: active.

What are the specifications of 5315-01-059-7677?

Key specifications for 5315-01-059-7677: Shank Diameter: 0.3720 INCHES MINIMUM AND 0.3735 INCHES MAXIMUM IN; Actuation Method: LEVER; Detent to Tapered End Distance: 0.335 INCHES MINIMUM AND 0.365 INCHES MAXIMUM IN; Detent Quantity: 2. 21 specifications are documented in the U.S. Government catalog.

Is NSN 5315-01-059-7677 hazardous material?

No hazard code in the DLA record (HMIC N). Hazard information on this page is shown exactly as it appears in the DLA record.

SOURCES

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-16.

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-18.

PartsTable — the parts reference. Every fact cited to its source.

partstable.com/parts/5315-01-059-7677


 Data cited from the U.S. Government catalog; commercial cross-references from OEM and certified industry sources.


 PartsTable Design LLC · partstable.com