

Rivet, Blind

5320-01-059-7562


NSN 5320-01-059-7562 · NIIN 010597562

FSC 5320 — Rivets · FSG 53 — Hardware and Abrasives

GOVERNMENT RECORD, CITED

ALSO SEARCHED AS 5320-01-059-7562 · 5320010597562 · NIIN 010597562 · 01-059-7562 · FSC 5320 Rivets

NEARBY STOCK NUMBERS ← 5320-01-059-7561 · 5320-01-059-7563 Rivet, Blind →

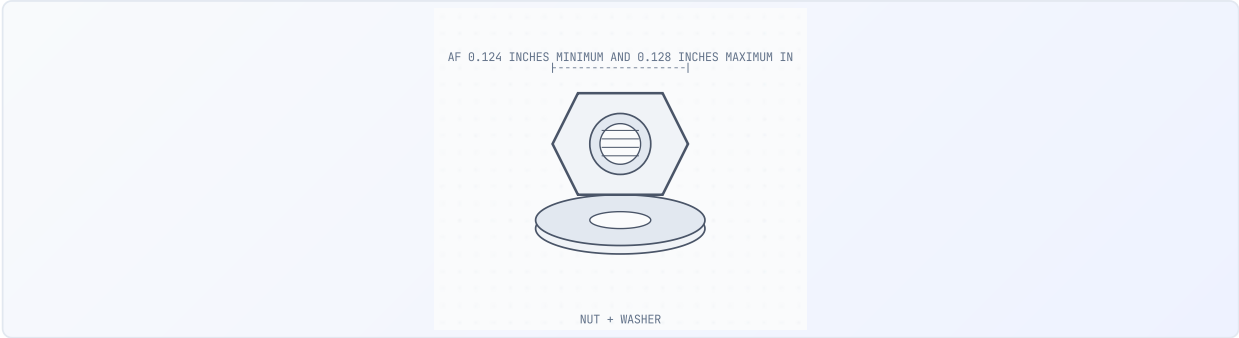

5320-01-059-7562 — RIVETS

FEATURES

- Rivet,blind — FSC 5320
- Shank Diameter: 0.124 INCHES MINIMUM AND 0.128 INCHES MAXIMUM IN
- Lubrication: DRY FILM
- Fastener Length: 0.323 INCHES MAXIMUM IN
- Expansion Device: SERRATED STEM-TYPE W
- Surface Treatment Document and Classification: QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE STEM
- Surface Treatment Document and Classification: QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE LOCKING RING
- Surface Treatment Document and Classification: QQ-P-35 FED SPEC 1ST TREATMENT RESPONSE OR QQ-P-416,CL 3,TY 2 FED SPEC 2ND TREATMENT RESPONSE OR NAS 4006 ASSN STD 3RD TREATMENT RESPONSE SLEEVE

IDENTIFICATION

- NSN: 5320-01-059-7562
- NIIN: 010597562
- FSC: 5320 — Rivets
- FSG: 53 — Hardware and Abrasives

GENERAL DESCRIPTION

The Rivet,blind, cataloged under National Stock Number 5320-01-059-7562, is classified within Federal Supply Class 5320 (Rivets) of the Hardware and Abrasives group. Government technical data includes 23 specifications, cited from the U.S. Government catalog. 1 additional reference document (drawings, advisory and superseded references) is recorded in the U.S. Government catalog. Current acquisition status: Active.

TECHNICAL SPECIFICATIONS

PARAMETER	VALUE
NSN	5320-01-059-7562
Item Name	Rivet,blind
FSC / FSG	5320 / 53 — Rivets
Status	ACTIVE

PARAMETER	VALUE
Shank Diameter	0.124 INCHES MINIMUM AND 0.128 INCHES MAXIMUM IN
Lubrication	DRY FILM
Fastener Length	0.323 INCHES MAXIMUM IN
Expansion Device	SERRATED STEM-TYPE W
Surface Treatment Document and Classification	QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE STEM
Surface Treatment Document and Classification	QQ-P-35 FED SPEC SINGLE TREATMENT RESPONSE LOCKING RING
Surface Treatment Document and Classification	QQ-P-35 FED SPEC 1ST TREATMENT RESPONSE OR QQ-P-416,CL 3,TY 2 FED SPEC 2ND TREATMENT RESPONSE OR NAS 4006 ASSN STD 3RD TREATMENT RESPONSE SLEEVE
Material Document and Classification	AMS 5737 ASSN STD SINGLE MATERIAL RESPONSE STEM
Material Document and Classification	AMS 5737 ASSN STD SINGLE MATERIAL RESPONSE SLEEVE
Material Document and Classification	AMS 5737 ASSN STD SINGLE MATERIAL RESPONSE LOCKING RING
Head Style	FLUSH (FLAT) COUNTERSUNK (INCLUDED ANGLE - LESS THAN 135 DEG W OR W/O CHAMFER)
Specification/standard Data	80205-NAS1921 PROFESSIONAL/INDUSTRIAL ASSOCIATION STANDARD
Grip Length	0.126 INCHES MINIMUM AND 0.187 INCHES MAXIMUM IN
Shank Style	SELF-PLUGGING MECHANICALLY LOCKED STEM
Surface Treatment	PASSIVATE STEM
Surface Treatment	PASSIVATE OR CADMIUM AND CHROMATE OR ALUMINUM ALLOY SLEEVE
Surface Treatment	PASSIVATE LOCKING RING
Countersink Angle	100.0 DEGREES NOMINAL
Shear Strength	1090 SINGLE POUNDS PER SQUARE INCH
Material	IRON ALLOY 660 STEM
Material	IRON ALLOY 660 SLEEVE
Material	IRON ALLOY 660 LOCKING RING
Head Major Diameter	0.229 INCHES MAXIMUM IN

LIFECYCLE & COMPLIANCE

Acquisition Status	ACTIVE
DEMIL Code	DEMIL A – NO DEMILITARIZATION REQUIRED
Hazard	NO HAZARD CODE IN THE DLA RECORD (HMIC N)
Criticality Code	X

CROSS-REFERENCE INDEX

No manufacturer part numbers on file in the U.S. Government catalog.

REFERENCE DOCUMENTS

REFERENCE	MEANING
NAS1921C04-03P	3/2 Design control — primary reference U.S. Government activity

No interchangeability data on file.

OTHER ITEMS IN FSC 5320 – RIVETS

Items in the same Federal Supply class. No interchangeability or substitution relationship is implied.

5320-00-001-1756 PIN-RIVET	5320-00-001-1756 PIN-RIVET	5320-00-001-2042 5320-00-001-2042 · Item name not on file	5320-00-001-3944 RIVET,SOLID
5320-00-001-5126 5320-00-001-5126 · Item name not on file	5320-00-001-5151 5320-00-001-5151 · Item name not on file	5320-00-001-5152 5320-00-001-5152 · Item name not on file	5320-00-001-5153 5320-00-001-5153 · Item name not on file

FREQUENTLY ASKED QUESTIONS

What is NSN 5320-01-059-7562?

NSN 5320-01-059-7562 is a Rivet,blind, classified under FSC 5320, Rivets. Status: active.

What are the specifications of 5320-01-059-7562?

Key specifications for 5320-01-059-7562: Shank Diameter: 0.124 INCHES MINIMUM AND 0.128 INCHES MAXIMUM IN; Lubrication: DRY FILM; Fastener Length: 0.323 INCHES MAXIMUM IN; Expansion Device: SERRATED STEM-TYPE W. 23 specifications are documented in the U.S. Government catalog.

Is NSN 5320-01-059-7562 hazardous material?

No hazard code in the DLA record (HMIC N). Hazard information on this page is shown exactly as it appears in the DLA record.

SOURCES

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-16.

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-18.

PartsTable — the parts reference. Every fact cited to its source.

partstable.com/parts/5320-01-059-7562

✓ Data cited from the U.S. Government catalog; commercial cross-references from OEM and certified industry sources.

 PartsTable Design LLC · partstable.com