

Home > BHSS00

BHSS00 — NUT, SELF-LOCKING, ROUND

✓ Government record, cited

— · NUT WASHER

PRODUCT OVERVIEW

BHSS00: NUT,SELF-LOCKING,ROUND.

The NUT,SELF-LOCKING,ROUND is a the manufacturer industrial component. Key specifications include material: STEEL COMP 303 NUT, nut_style: ROUND, temp_rating: 350.0 FAHRENHEIT MAXIMUM DEGF, nut_diameter: 0.735 INCHES MINIMUM AND 0.750 INCHES MAXIMUM IN, nut_thickness: 0.250 INCHES MINIMUM AND 0.282 INCHES MAXIMUM IN, thread_series: UNS. This part is cataloged in the U.S.

Government catalog under NSN 5310-01-080-3440, indicating validated use in U.S. government and defense logistics supply chains. Available through authorized enterprise resellers and TPM (Third Party Maintenance) channels.

Verify compatibility with your specific system configuration before ordering.

WHERE IT FITS

BHSS00


NSN: 5310-01-080-3440
FSC: 5310 — Nuts and Washers
CAGE: 79568 — WHITTET-HIGGINS COMPANY (USA)

SPECIFICATIONS

material	STEEL COMP 303 NUT
nut_style	ROUND
temp_rating	350.0 FAHRENHEIT MAXIMUM DEGF
nut_diameter	0.735 INCHES MINIMUM AND 0.750 INCHES MAXIMUM IN
nut_thickness	0.250 INCHES MINIMUM AND 0.282 INCHES MAXIMUM IN
thread_series	UNS

locking_feature	PREVAILING TORQUE WITH NONMETALLIC INSERT
thread_direction	RIGHT-HAND
drive_point_depth	0.088 INCHES MINIMUM AND 0.096 INCHES MAXIMUM IN
drive_point_width	0.105 INCHES MINIMUM AND 0.135 INCHES MAXIMUM IN
surface_treatment	PASSIVATE OVERALL EXCEPT INSERT
small_end_diameter	0.625 INCHES NOMINAL IN
NSN	5310-01-080-3440

COMPONENT DIAGRAM

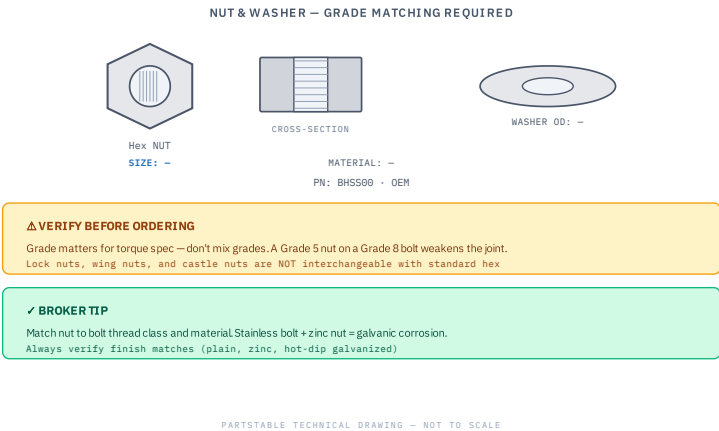

KEY FEATURES

- **THREAD SERIES: UNS**
- **TEMP RATING: 350.0 FAHRENHEIT MAXIMUM DEG F**
- **THREAD PITCH DIAMETERS: +0.3707 TO 0.3733 INCHES IN**
- **DRIVE POINT WIDTH: 0.105 INCHES MINIMUM AND 0.135 INCHES MAXIMUM IN**
- **THREAD DIRECTION: RIGHT-HAND**

- **NOMINAL THREAD SIZE: 0.391 INCHES IN**
- **NUT DIAMETER: 0.735 INCHES MINIMUM AND 0.750 INCHES MAXIMUM IN**
- **DRIVE POINT DEPTH: 0.088 INCHES MINIMUM AND 0.096 INCHES MAXIMUM IN**

TECHNICAL CHARACTERISTICS

THREAD SERIES	UNS
TEMP RATING	350.0 FAHRENHEIT MAXIMUM DEGF
THREAD PITCH DIAMETERS	+0.3707 TO 0.3733 INCHES IN
DRIVE POINT WIDTH	0.105 INCHES MINIMUM AND 0.135 INCHES MAXIMUM IN
THREAD DIRECTION	RIGHT-HAND
NOMINAL THREAD SIZE	0.391 INCHES IN
NUT DIAMETER	0.735 INCHES MINIMUM AND 0.750 INCHES MAXIMUM IN
DRIVE POINT DEPTH	0.088 INCHES MINIMUM AND 0.096 INCHES MAXIMUM IN
UNDERCUT THICKNESS	0.094 INCHES NOMINAL IN
LOCKING FEATURE	PREVAILING TORQUE WITH NONMETALLIC INSERT

OTHER ITEMS IN FSC 5310 — NUTS AND WASHERS

Items in the same Federal Supply class. No interchangeability or substitution relationship is implied.

5310-00-000-0040	5310-00-000-0077	5310-00-000-0079	5310-00-000-1146
5310-00-000-3815	5310-00-000-4532	5310-00-000-4540	

SUBSTITUTES & CROSS-REFERENCES

No substitute or cross-reference records for this part.

LIFECYCLE

NSN status

Active

· U.S. Government catalog

Acquisition advice: Normally procured from the manufacturer (OEM)

No demilitarization required

FREQUENTLY ASKED QUESTIONS

What is BHSS00?

BHSS00 is a NUT,SELF-LOCKING,ROUND.

What is the NSN for BHSS00?

BHSS00 is cataloged in the U.S. Government catalog under NSN 5310-01-080-3440. This indicates validated use in U.S. government and defense supply chains.

✓ **PartsTable** — the parts reference. Every fact cited to its source.

 **PartsTable Design LLC · partstable.com**

U.S. Government catalog: edition PUBLOGDVD v12.0.0 (OCT 2026), edition date 2026-10-01, retrieved 2026-10-18.

PartsTable commercial catalog: edition Unified commercial catalog snapshot through 2026-09-28, edition date not on file, retrieved 2026-09-28.