



[Home](#) > [Fujitsu](#) > [S26361-F3996-L563](#)

S26361-F3996-L563 – Network Technical Data

Fujitsu · SFP TRANSCEIVER

WHAT YOU NEED TO KNOW

SR = Short Range (multimode, 300m) | LR = Long Range (single-mode, 10km) DOM = Digital Optical Monitoring — most enterprise SFPs support it

⚠ MATCH ALL THREE: Speed + Wavelength + Brand compatibility

PRODUCT OVERVIEW

Fujitsu provides highly reliable and durable cables for your high performance networking applications, network adapters, switches, hubs, routers, DSL/cable modems, and patch panels. Available through authorized enterprise resellers and TPM (Third Party Maintenance) channels. Verify compatibility with your specific system configuration before ordering.

WHERE IT FITS

S26361-F3996-L563


SPECIFICATIONS

Part Number	S26361-F3996-L563
Manufacturer	Fujitsu
Capacity	56GB

FITS THESE MACHINES

[Fujitsu Primergy RX2540 M4](#)

COMPONENT DIAGRAM

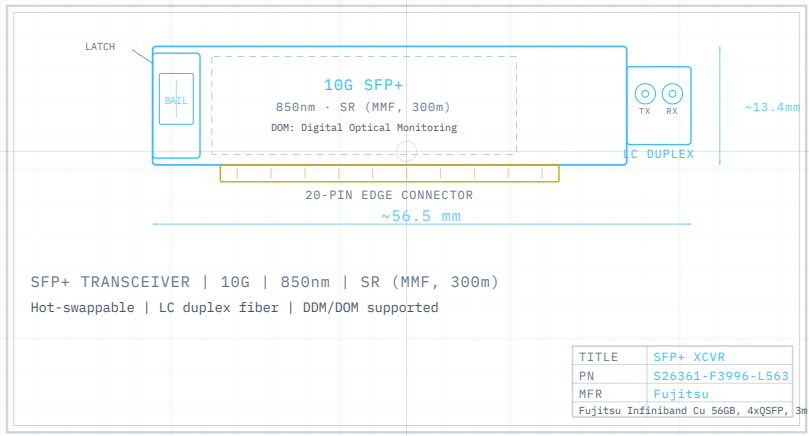

KEY FEATURES

- 56GB Capacity

TYPICAL APPLICATIONS

- Data center top-of-rack switching
- High-speed server interconnects (10G/25G/40G/100G)
- Storage network fabric (iSCSI, FCoE)
- Campus and branch network infrastructure
- Firewall and security appliance connectivity
- WAN edge and SD-WAN deployments

SUBSTITUTES & CROSS-REFERENCES

No substitute or cross-reference records for this part.

LIFECYCLE

No lifecycle data available.

✓ PartsTable — the parts reference. Every fact cited to its source.

 PartsTable Design LLC · partstable.com

PartsTable commercial catalog: edition Unified commercial catalog snapshot through 2026-09-28, edition date not on file, retrieved 2026-09-28.